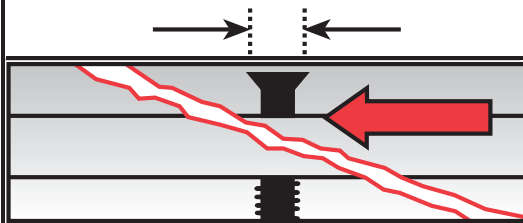


DePuy ACE Screw Reference Chart

Cannulated Screws

3.5/4.0 mm				4.5/5.0 mm			6.5/8.0 mm		
Screw Type	3.5 mm Cannulated Cortical Full Thread	4.0 mm Cannulated Cancellous Lag; Standard or Reduced Head Thread 1/3 Screw Length	4.0 mm Cannulated Cancellous Full Thread Reduced Head	4.5 mm Cannulated Cortical Full Thread	4.5 mm Cannulated Cortical Lag 20 mm Thread	5.0 mm Cannulated Cancellous Lag 20 mm Thread; Standard or Reduced Head	6.5 mm Cannulated Cancellous 22 mm Thread	6.5 mm Cannulated Cancellous 40 mm Thread	8.0 mm Cannulated Cancellous 24 mm Thread
Catalog Number	14375-XX	14376-XX 1802-49-0XX*	1802-48-0XX	14200-XX	14250-XX	14225-XX 1802-53-0XX*	14196-XX	14197-XX	14192-XX
									
Available Screw Lengths	10-50 mm even sizes only and 55, 60, 65 and 70 mm			20-50 mm even sizes only and 55, 60, 65 and 70 mm	30-50 mm even sizes only and 55, 60, 65 and 70 mm	30-50 mm even sizes only and 55-100 mm in multiples of 5 mm	25-120 mm in multiples of 5 mm	40-120 mm in multiples of 5 mm	35-120 mm in multiples of 5 mm
Inner (minor) Diameter	2.6 mm	2.8 mm		3.7 mm		3.6 mm	5.0 mm		5.5 mm
Outer (major) Diameter	3.5 mm	4.0 mm		4.5 mm		5.0 mm	6.5 mm		8.0 mm
Thread Pitch	0.75 mm	1.82 mm		1.0 mm		1.8 mm	1.82 mm		2.5 mm
Gliding Hole Drill Bit	3.5 mm (8290-34-070)	N/A		4.5 mm (2141-44-000)	N/A	N/A	N/A		
									
Threaded Hole Drill Bit	2.9 mm (8290-30-070)	2.9 mm optional (8290-30-070)		3.8 mm (2141-43-000)			5.0 mm (14629)		5.5 mm (14447)
Tap	3.5 mm (8241-67-000)	Self-tapping 4.0 mm optional (8241-62-000)		Self-tapping 4.5 mm optional (2141-45-000)		Self-tapping 5.0 mm optional (2141-46-000)	Self-tapping 6.5 mm optional (14627)		Self-tapping 8.0 mm optional (14634)
Hex Drive	2.5 mm	2.5 mm		3.5 mm			5.0 mm		
Cutting Flute Length	N/A	2.0 mm		6.0 mm			6.0 mm		
Guide Pin Diameter	1.6 mm Trocar Tip (14425-6) Threaded Tip (8290-16-006)			2.0 mm Bayonet Tip (14179-9) Threaded Tip (1651-01-000)			3.2 mm Threaded Tip (14012-9)		

*Denotes reduced head screw